

# PARKETOLIT

# 1549

## 2c PU ADHESIVE FOR PARQUET

### Using for gluing:

- **All types of parquet:** solid parquet elements, mosaic parquet, solid lamparquet, solid boards, solid vertical finger parquet, multy-layer parquet
- **On any kind of subfloor:** on porous (cement, wooden, anhydrite) and on unporous (ceramics, marble) ...
- Suitable also for **wet cement subfloors** with residual moisture content from 2 to 4 CM% with using primer Parketolit PR51 or Parketolit PR50,
- **On underfloor heating installations.**

### Suitable also for:

- **laying rubber** and
- **gluing wooden steps** on any type of subfloors.

### Benefits from using adhesive:

- adhesive with neutral odour, water and solvent free,
- easily spread with notched trowel,
- keeps the form of applying,
- long pot life of the mixture A+B: (60-90 minutes, 14kg at 20°C),
- long open time: (120-180 minutes at 20°C),
- fast curing without spread quantity limits,
- lasting quality joint.

### Spreading quantity:

- with notched trowel B3: 800-900 g/m<sup>2</sup>
- with notched trowel 23/48: 1000-1500 g/m<sup>2</sup>


### Packing:

- plastic vessel of 14 kg (12,85kg A+ 1,15kg B),  
1 pallet = 44 vessels, total 616 kg.

For more information, please call ++386 **573 12 326** or mail to [prodaja@mitol.si](mailto:prodaja@mitol.si).



Adhesive with neutral odour,  
water and solvents free.

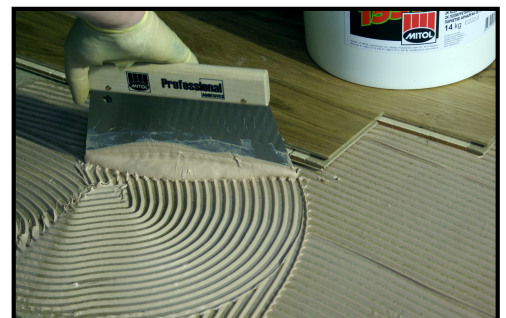

Easy to apply,  
with long open time.



Sanding and lacquering are  
already possible one day  
after laying parquet.



MITOL, tovarna lepil, d.o.o., Sežana, Partizanska c. 78, 6210 Sežana, Slovenija  
T: +386 5 73 12 300, F: +386 5 73 12 390, E: [mitol@mitol.si](mailto:mitol@mitol.si), I: [www.mitol.si](http://www.mitol.si)

# CHOOSE THE RIGHT ADHESIVE

	PARKETOLIT 1513	PARKETOLIT 1514	PARKETOLIT 1549	PARKETOLIT 1550	PARKETOLIT 1551	PARKETOLIT 1554	PARKETOLIT 1555	PARKETOLIT E60	PARKETOLIT E61	PARKETOLIT E65	PARKETOLIT E66	PARKETOLIT D3	MEKOL 1560	MEKOL 1570	MEKOL 1580	MITOPUR 1530
<b>SOLID PARQUET ELEMENTS</b>																
• on concrete or on leveller	■	■	●	●	●	●	●	●	●	●	●					
• on wooden floors		■	●	●	●	●	●	●	●	●	●					
• on nonporous surfaces			●	●	●	●	●	●	●	●	●					
• on heated floors			●	●	●	■	■	●	●	●	●					
• on concrete with increasing moisture			■	■	■	■	■	●	●	■	■					
• unstable wood (beech, ash...)			■	■	■	■	●	●	●	●	●					
<b>MOSAIC PARQUET</b>																
• on concrete or on leveller	●	●	●	●	●	●	●	●	●	●	●					
• on wooden floors		●	●	●	●	●	●	●	●	●	●					
• on nonporous surfaces			●	●	●	●	●	●	●	●	●					
• on heated floors	●	■	●	●	●	■	■	●	●	●	●					
• on concrete with increasing moisture			■	■	■	■	■	●	●	■	■					
• unstable wood (beech, ash...)			●	●	●	●	●	●	●	●	●					
<b>SOLID LAMPARQUET</b>			●	●	●	●	●	●	●	■	■					
<b>SOLID BOARDS</b>			●	●	●	●	●	■	■	■	■					
<b>MULTY-LAYER PARQUET</b>			■	■	■	●	●	●	●	●	●	●				
<b>SOLID VERTICAL FINGER PARQUET</b>			●	●	●	●	●	●	●	●	●					
<b>LAMINATED FLOORS</b>								■	■	■	■	●				
<b>PVC</b>													●	●	●	■
<b>TEXTILE COVERINGS</b>													●	●		
<b>CORK (natural, plastic)</b>														●		
<b>RUBBER</b>			■	■	■			■	■	■	■				●	●
<b>LINOLEUM</b>															●	
<b>CERAMIC TILES</b>			■	■	■	■	■	■	■	■	■					■
<b>ARTIFICIAL GRASS</b>			■	■	■	■	■									●
<b>WOODEN STEPS</b>			■	■	■	■	■	■	■	■	■					■

● basic use

■ possible use



MITOL, tovarna lepil, d.o.o., Sežana, Partizanska c. 78, 6210 Sežana, Slovenija  
T: +386 5 73 12 300, F: +386 5 73 12 390, E: [mitol@mitol.si](mailto:mitol@mitol.si), I: [www.mitol.si](http://www.mitol.si)